







PMG 600

PRE-SHREDDER WITH CONVEYOR

PMG pre-shredders, with high cutting efficiency, have been designed to reduce the size of different materials.

Production can be improved by choosing the appropriate grid for each specific material.



Manufactured in accordance to CE rules

Cutting chamber heavy duty and easy to replace blades.

to improve performance and safeguard the transmission system (belts, gearbox, etc...).

RECYCLING SYSTEMS





EXAMPLES OF PROCESSED MATERIAL (INPUT / OUTPUT)



TECHNICAL SPECIFICATIONS

o Loading hopper: 1275 x 2055 mm


o Rotor diameter. 220 mm

O Pusher stroke: 600 mm


o Screen sizes: Ø 12-15-20-30-40-50 mm

o Number of rotating blades: 23

- Number of external blades: 4
- Number of counterblades: 1
- o Drive type: V-belts
- o Installed power: 20 kW 39 A
- o Voltage (standard): 380 V 50 Hz
- o Total weight: 1840 kg
- Noise level (not loaded): _ db(A)



Α	1750 mm
В	4660 mm
B1	4925 mm
С	2720 mm
C1	2255 mm
D	1820 mm
Е	2055 mm
F	1275 mm

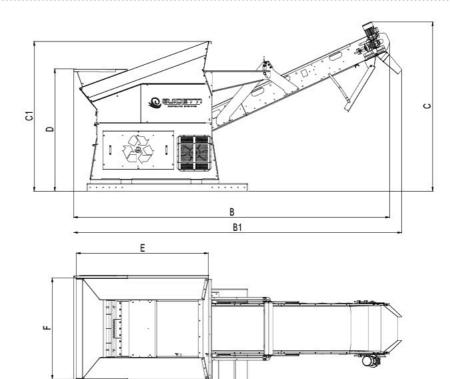



WHY CHOOSE PMG 600

- Best price/quality ratio.
- o Rapid return of the investment.
- o High resale value maintained over time.
- Wide range of material that can be recycled..
- Automates production and reduces labor.
- Reduces use, wearing and maintaining on the granulating lines.
- o Easy to use and maintain.
- o Fast and reliable service by factory trained technicians.



GUIDETTI EAST srl Str. I.V. Ispas, 14 - ap.3

555300 Cisnadie - jud. SB - Romania

web : www.guidettieast.com e.mail : info@guidettieast.com Ph. +40.724544260

DIMENDIONS ON INPUT CABLE

- o Max. cable diameter. Ø 70-90 mm
- o Max. length rigid cable: 800-1000 mm

OPTIONALS

- Discharge conveyor belt. (Standard version or with magnetic pulley)
- Extended warranty.

COMBINATIONS

- Conveyor belt. (For feeding or discharge)
- o Granulator or recycling line.
- o Densimetric table.
- Magnetic separator.
- Zig-Zag separator.
- o Pneumatic transport.



WARRANTY EXTENTION

"YOU WORK WE CARE"

Warranty extentions can be purchased for up to 24-36 months from date of shipment. Extended warranty covers the replacement of parts that are defective. Wear items are excluded from all warranties. A yearly visit by a factory trained technician (2 or 3 depending on the extention purchased) will be made to verify the general condition of the equipment.