

**TRY BEFORE
YOU BUY**

TESTING LAB



- Choose the most suitable equipment.
- Test your own material.
- Touch the result with your own hands.

PMG 900 H

HYDRAULIC DRIVE PRE-SHREDDER WITH CONVEYOR


PMG pre-shredders, with high cutting efficiency, have been designed to reduce the size of different materials.

Production can be improved by choosing the appropriate grid for each specific material.


CE

made in Italy



Magnetic pulley
to remove ferrous materials.

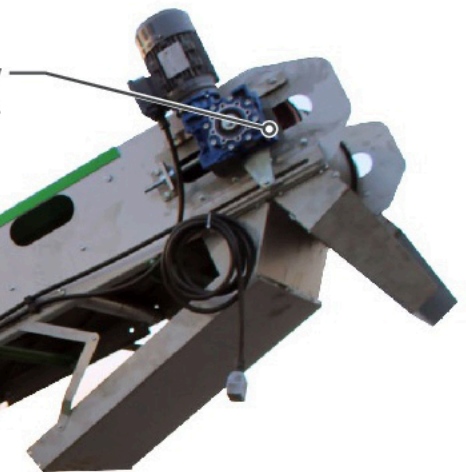


Fast fixing system
reduces the size making the machine more compact.

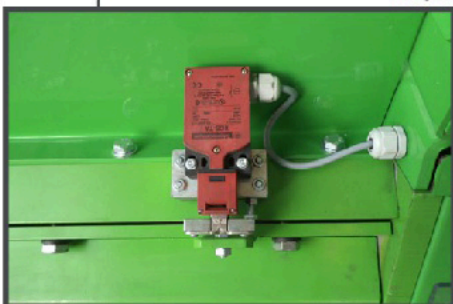

Manufactured in accordance to CE rules

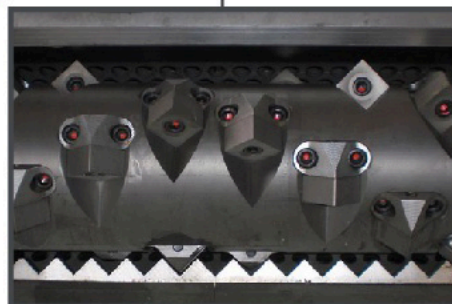

Cutting chamber
heavy duty and easy to replace blades.

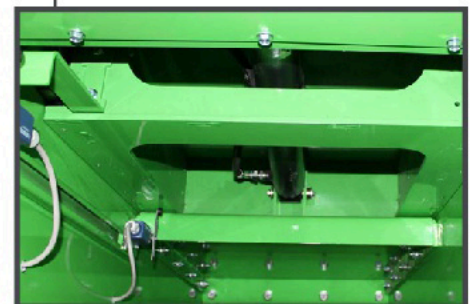



Hydraulic pusher
to ensure constant feeding.

EXAMPLES OF PROCESSED MATERIAL (INPUT / OUTPUT)




TECHNICAL SPECIFICATIONS

- Loading hopper: 889 x 1691 mm
- Rotor diameter: 220 mm
- Pusher stroke: 600 mm
- Screen sizes: Ø 12-15-20-30-40-50 mm
- Number of rotating blades: 34
- Number of external blades: 4
- Number of counterblades: 1
- Drive type: **Hydraulic**
- Installed power: 38,5 kW - 70,5 A
- Voltage (standard): 380 V - 50 Hz
- Total weight: 2840 kg
- Hydraulic oil tank capacity: 130 liters
- Noise level (not loaded): _ db(A)

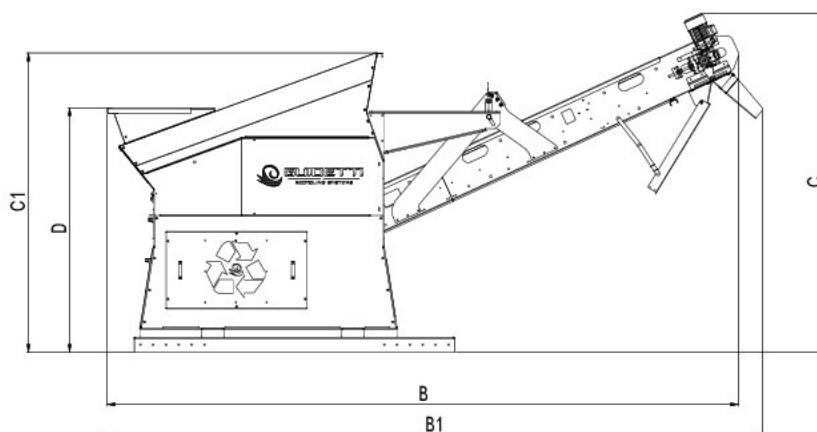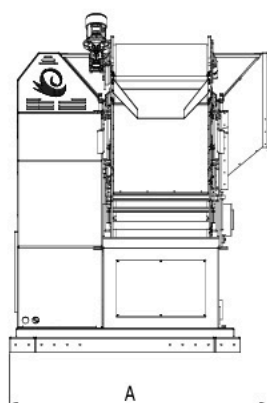

A	2069 mm
B	4766 mm
B1	4956 mm
C	2660 mm
C1	2365 mm
D	1965 mm
E	1691 mm
F	889 mm

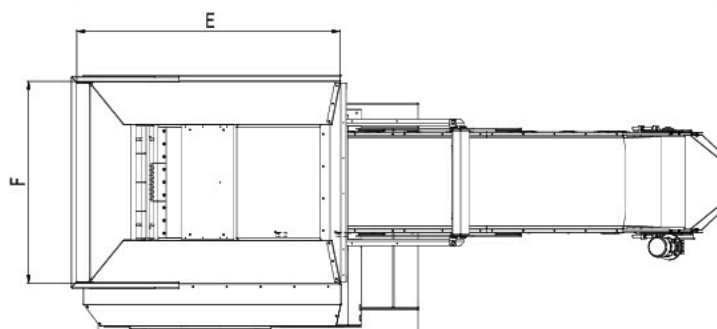



WHY CHOOSE PMG 900 H

- Best price/quality ratio.
- Rapid return of the investment.
- High resale value maintained over time.
- Wide range of material that can be recycled..
- Automates production and reduces labor.
- Reduces use, wearing and maintaining on the granulating lines.
- Easy to use and maintain.
- Fast and reliable service by factory trained technicians.



GUIDETTI EAST srl

Str. I.V. Ispas, 14 - ap.3

555300 Cismădie - jud. SB - Romania

web : www.guidettieast.com

e.mail : info@guidettieast.com

Ph. +40.724544260

DIMENSIONS ON INPUT CABLE

- Max. cable diameter: Ø 80-120 mm
- Max. length rigid cable: 1000-1200 mm

OPTIONALS

- Discharge conveyor belt.
(Standard version or with magnetic pulley)
- Extended warranty.

COMBINATIONS

- Conveyor belt.
(For feeding or discharge)
- Granulator or recycling line.
- Densimetric table.
- Magnetic separator.
- Zig-Zag separator.
- Pneumatic transport.



WARRANTY EXTENTION

"YOU WORK WE CARE"

Warranty extensions can be purchased for up to 24-36 months from date of shipment. Extended warranty covers the replacement of parts that are defective. Wear items are excluded from all warranties. A yearly visit by a factory trained technician (2 or 3 depending on the extension purchased) will be made to verify the general condition of the equipment.

